



US 20160291597A1

(19) **United States**

(12) **Patent Application Publication**  
**Monica et al.**

(10) **Pub. No.: US 2016/0291597 A1**  
(43) **Pub. Date: Oct. 6, 2016**

(54) **GROUP FOR LOCALIZING A MOVING TARGET IN A WAREHOUSE WITH AUTOMATIC GUIDED VEHICLES**

**Publication Classification**

(71) Applicant: **Elettric 80 S.p.A.**, Viano (Reggio Emilia) (IT)

(51) **Int. Cl.**  
*G05D 1/02* (2006.01)  
*G01S 5/10* (2006.01)  
*G05D 1/00* (2006.01)

(72) Inventors: **Stefania Monica**, Viano (Reggio Emilia) (IT); **Gianluigi Ferrari**, Viano (Reggio Emilia) (IT); **Massimiliano Magnani**, Viano (Reggio Emilia) (IT); **Fabio Oleari**, Viano (Reggio Emilia) (IT); **Francesco De Mola**, Viano (Reggio Emilia) (US)

(52) **U.S. Cl.**  
CPC ..... *G05D 1/0268* (2013.01); *G05D 1/0088* (2013.01); *G01S 5/10* (2013.01)

(57) **ABSTRACT**


(21) Appl. No.: **15/088,734**



(22) Filed: **Apr. 1, 2016**

(30) **Foreign Application Priority Data**

Apr. 2, 2015 (IT) ..... 1020150000108725

The present invention relates to a localisation or estimation group of the position of a moving target, such as a person or a manual guided vehicle, in a warehouse or in an area to be monitored with at least one automatic guided vehicle, equipped with a unit for controlling the movement of the automatic guided vehicle itself, and at least a moving target.

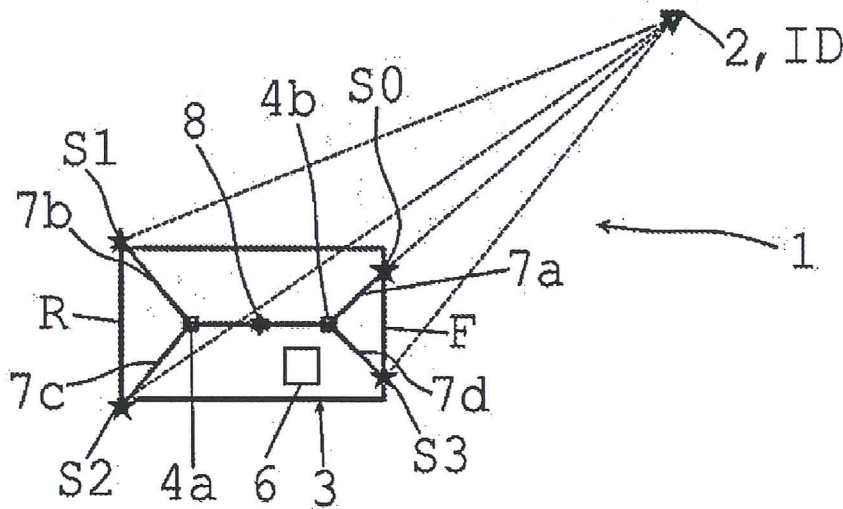

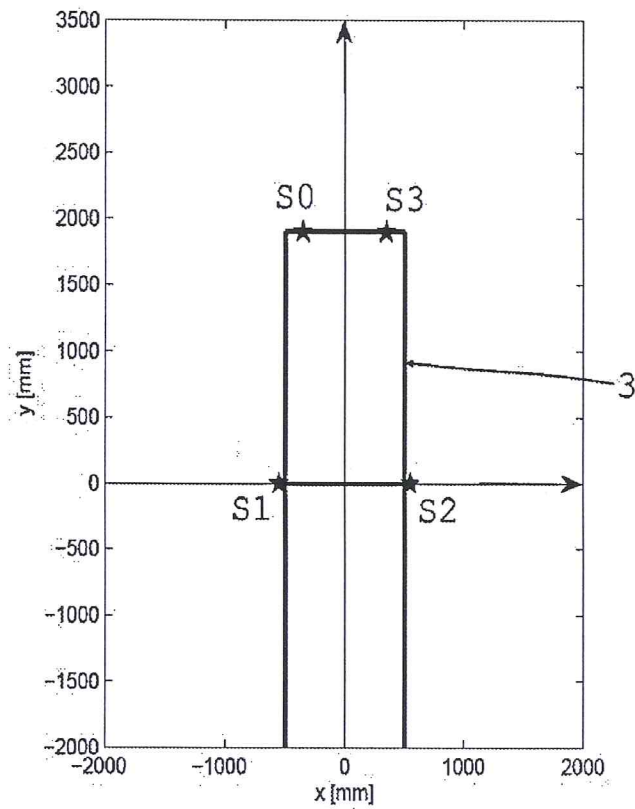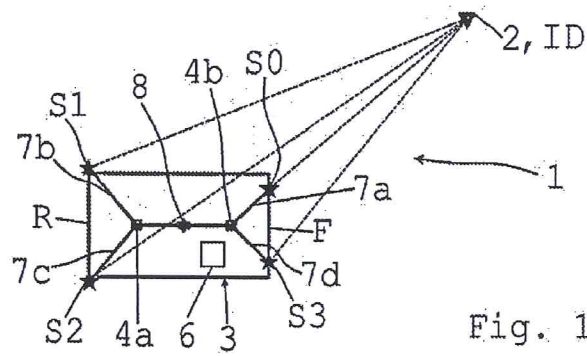

## GROUP FOR LOCALIZING A MOVING TARGET IN A WAREHOUSE WITH AUTOMATIC GUIDED VEHICLES

### TECHNICAL FIELD OF THE INVENTION

[0001] The present invention relates to a localisation group for a moving target in a warehouse with automatic guided vehicles, as well as a method of localization for a moving target, with the term moving target meaning persons, forklift trucks or manual guided vehicles or TN, etc., which move in the warehouse together with the automatic guided vehicles.

### STATE OF THE ART

[0002] Typically, the localisation of moving objectives or targets such as persons, forklift trucks or manual guided vehicles moving in warehouse or industrial areas in general, is carried out by arranging a plurality of antennas at fixed nodes, called anchors (in English anchor nodes), which send the detected signals to a centralized controller that uses the received signals to estimate through triangulation algorithms and possible evolution thereof the position of the moving target and, accordingly, signal such position to the control unit of the automatic guided vehicles, in order to avoid the collision of the automatic guided vehicles, for example LGV (Laser guided vehicle) or AGV (automatic guided vehicle), with the moving target.

[0003] Such system requires the installation of a plurality of antennas, called anchors or nodes or anchor nodes, in the area of interest, usually a warehouse, thereby involving high installation costs, as well as a complex handling of the communications between the moving targets, the nodes or the anchors, the controller of the nodes and the control unit of the automatic guided vehicles.

### OBJECTS OF THE INVENTION

[0004] One object of the present invention is to provide for an improved localisation or position estimation group for a moving target, such as a person or a manual guided vehicle, in a warehouse with automatic guided vehicles.

[0005] Another object of the present invention is to provide for a localisation or position estimation group for a moving target, such as a person or a manual guided vehicle, in a warehouse with automatic guided vehicles, which is able to localize or detect in a fast and effective way such moving target.

[0006] One further object of the present invention is to provide for a localisation or position estimation group of the type mentioned above, which is able to detect the position of a moving target, such as a person or an automatic guided vehicle and avoid the collision of automatic guided vehicles with the moving target.

[0007] Yet another object of the present invention is to provide for a localisation or position estimation group for a moving target, such as a person or a manual guided vehicle, in a warehouse with automatic guided vehicles which allows to simplify the localisation group and the installation thereof.

[0008] According to one aspect of the present invention, a localisation group according to the present principles is provided.

[0009] The present application refers to preferred and advantageous embodiments of the invention.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Other features and advantages of the invention will be more apparent from the description of one embodiment of a localisation group, given for indicative purpose in the enclosed drawings, wherein:

[0011] FIG. 1 shows a localisation group according to the present invention; and

[0012] FIG. 2 shows the group of FIG. 1 in a coordinate system.

[0013] In the enclosed drawings, the same parts or components are associated to the same reference numbers.

### DETAILED DESCRIPTION OF THE INVENTION

[0014] The present invention relates to a localisation or estimation group of the position for at least one moving target 2, such as a person, a forklift truck or a manual guided vehicle, etcetera, which is in a warehouse or in an area to be monitored, such as a production area in general, an outdoor stocking area, a port, etcetera, together with automatic guided vehicles, hereafter also referred to as AGV (Automatic guided vehicle) or LGV (Laser guided vehicle).

[0015] In the warehouse or the area to be monitored at least one automatic guided vehicle 3 is also present, which vehicle is provided with localisation means 1 for the moving target 2.

[0016] In fact, an important feature of the present invention is that the localisation means 1 for the moving target 2 are provided on the automatic guided vehicle 3. This feature allows to remarkably simplify the installation of the nodes with the relative antennas for detecting moving targets in the warehouse or area to be monitored, because it is not necessary anymore to place the localisation means, which usually comprise the antennas, at fixed points in the warehouse or in the area to be monitored.

[0017] Moreover, thanks to such expedient, it is possible to reduce the number of antennas required to "cover" or monitor the entire area of the warehouse or the area to be monitored, by positioning a reduced number of antennas on vehicles, if desired only on vehicles.

[0018] Moreover, in this way the antennas are positioned only where they are actually needed, i.e. where the automatic guided vehicles are.

[0019] The localisation means 1 of the vehicle 3 comprise at least two first nodes for emitting and receiving signals, each first node being provided with an antenna (not shown) for receiving/emitting signals.

[0020] The first nodes of the vehicle 3 can be more than two, for example three and, according to the embodiment shown in the figure, even four, referred to as S0, S1, S2, S3.

[0021] In general, the number of first nodes on the automatic guided vehicle 3 can be any, starting from two.

[0022] For example, two first nodes, S0 and S3, can be placed in the front F of the vehicle 3, and send signals towards the moving target 2 to be localized.

[0023] The moving target 2, in turn, is provided with a second node or marker, identified in FIG. 1 with the same number 2 of the moving target, the second node or marker comprising in turn at least one antenna capable of receiving/emitting signals.

[0024] Accordingly, when the first nodes of vehicle 3 send signals towards the second node or marker of the moving

target 2 to be localized, by the same target 2 a return signal is obtained towards the first nodes of the vehicle 3.

[0025] It is to be noted that the first nodes S0, S1, S2, S3, being placed on the automatic guided vehicle 3, are also integral with respect to each other and form a group of fixed nodes therebetween, yet nodes which move with vehicle 3.

[0026] The first nodes S0, S1, S2, S3 cooperate with each other to localize the moving node uncoupled from the fixed nodes rigid with each other, the moving node being the one on the moving target 2.

[0027] The first emitting/receiving nodes of the vehicle 3 and the marker of the moving target 2 can use electromagnetic waves of the same ultra wide band type, or UWB, or also other types of transmission signals by electromagnetic waves can be used, for example Wi-Fi or Bluetooth (trademarks registered by their respective owners).

[0028] The marker of the moving target 2 can also comprise an ID identification code, which allows to distinguish a moving target 2 from another, if in the warehouse or area to be monitored several moving targets 2 are present.

[0029] According to one version not shown, each antenna of the first nodes S0, S1, S2, S3 is operated by a respective emission/reception unit.

[0030] According to one version of the present invention shown in FIG. 1, each of the first nodes S0, S1, S2, S3 comprises one antenna, and such antennas are operated in couple, by two emission/reception units 4a, 4b.

[0031] In general, in the automatic guided vehicle 3 several first nodes can be provided with respective antennas, which antennas are operated by a lower number of emission/reception units. In particular, a single emission/reception unit can also operate all the antennas of the first nodes S0, S1, S2, S3 of the vehicle 3.

[0032] Vehicle 3 also comprises electrical powering means 8 for the emission/reception units 4a, 4b and/or for the programming control unit 6.

[0033] With reference to the way in which the nodes are operated by a lower number of emission/reception units, this can occur, for example, according to a time division multiplexing logic, the emission/reception units 4a and 4b thereby comprising means for carrying out the time division multiplexing of the signals from and towards the first emitting and receiving nodes S0, S1, S2, S3.

[0034] Alternatively, emission/reception units (control units) could, for example, be provided, capable of supporting two or more independent output channels and to process in parallel the signals received by the antennas.

[0035] As already stated, in the embodiment shown in FIG. 1, vehicle 3 comprises two emission/reception units 4a and 4b, as well as the first emitting and receiving nodes S0, S1, S2, S3 with the respective antennas; the emission/reception units 4a, 4b are then connected to the antennas of the first emitting and receiving nodes S0, S1, S2, S3, by transmission means 7a, 7b, 7c, 7d.

[0036] The first nodes S0, S1, S2, S3 emitting and receiving the electromagnetic waves thereby form the anchors or nodes of virtual type, i.e. they are antennas which are operated by a lower number of emission/reception units.

[0037] More in detail, according to the example of FIG. 1, unit 4a operates the first node S1 through channel 7b, and the first node S2 through channel 7c, while unit 4b operates the first node S0 through channel 7a, and lastly the first node S3 through channel 7d.

[0038] In this way, the advantage of a reduction of components cost is obtained, since the antennas are less expensive with respect to the nodes equipped with emission/reception units, and a more easy handling of the signals coming from the nodes is also achieved, given that each unit 4a or 4b is able to coordinate independently the virtual nodes to which it is connected.

[0039] The connections between nodes and the units 4a, 4b can, for example, be obtained by means of extensions (cables), even if connections of other types could also be provided, if desired wireless.

[0040] The automatic guided vehicle 3 comprises in addition a controller or programming control unit 6 in connection with the emission/reception units 4a, 4b, in order to control the emission and the reception of detection signals of the first nodes S0, S1, S2, S3 and, thus, calculate the position of the moving target 2, through a triangulation between the involved nodes.

[0041] Nodes S0, S1, S2, S3 can be positioned two at the front or first front F of the vehicle and two at the rear or second front R of the vehicle. In particular, each node can be provided close to an angle of the vehicle 3 outline, considering the plan view of the vehicle outline as approximately a rectangle, thereby allowing a geometrical position of the nodes on the vehicle more favorable in order to carry out the triangulation with the moving target 2.

[0042] Of course, the nodes could be positioned also in a way different from the one described above, for example as a cross or according to other suitable arrangement.

[0043] The localisation group 1 according to the invention therefore allows to localize or appropriately estimate the position of a moving target, thanks to the antennas of the nodes installed on each automatic guided vehicle.

[0044] According to one version of the present invention, some nodes could be added, with the respective antennas, at fixed points of the warehouse (not shown), in order to improve the localisation of the moving target, since, at certain positions and according to certain configurations of the warehouse, the localisation of the moving target with the only nodes positioned on the automatic guided vehicle could show lower precision than the necessary one. Thus for example, in the corridors, the vehicles and the obstacles/objectives are less in number (thus less "density"), while in the shipping areas many vehicles and many obstacles/objectives are usually present, therefore a higher localisation precision is necessary.

[0045] There is anyway a notable simplification with respect to the solutions with the net of localisation nodes placed at fixed points of the warehouse or area to be monitored.

[0046] It should be noted that automatic guided vehicles are connected to a centralized control device which handles the movement thereof and, thus, perfectly knows the position at each instant of each automatic guided vehicle, such position is for example estimated by integrating odometry and laser scanning or other systems (for example vision system for line-following, inertial units, etcetera) on the above mentioned vehicles, and this allows, in combination with the localisation means of the moving targets above described, an optimal and safe movement of the automatic guided vehicles in the warehouse or in the area to be monitored.

[0047] According to a version of the present invention, the localisation group can comprise several automatic guided

vehicles 3 provided with localisation means as indicated above, the above mentioned localisation means being able to detect the position of the moving target, and also to communicate between each other or anyway with a general controller of the group, in order to obtain an efficient and safe handling of the traffic in the warehouse or area to be monitored.

[0048] According to embodiments which are not object of the present invention and therefore not described more in detail, the automatic guided vehicle 3 comprises movement means, for example, wheels or movement tracks, motor means for actuating the wheels or tracks and controlled by a control unit for the controlled movement of the vehicle in a respective warehouse.

[0049] In case, the same unit controlling the movement of the vehicle can comprise also the controller or programming control unit 6 which controls the emission/reception units 4a, 4b.

[0050] The steps of a possible localisation or position estimation method with a group according to the present invention will be now described. To this regard, the case wherein the localisation group comprises one vehicle with four nodes is considered, but, as will be understood, similar considerations are applied to a group provided with one or more vehicles, each with two or three nodes.

[0051] A coordinate system which could be used is that shown in FIG. 2, wherein the x axis is the line between nodes S1 and S2 (behind or on the rear R of the vehicle, for example a LGV) and the origin is the intermediate point between S1 and S2. In the considered coordinate system, the nodes coordinates on board, expressed in millimeters, are:

$$S0=[-350,1900]S1=[-550,0] \quad (2.1)$$

$$S2=[550,0]S3=[350,1900] \quad (2.2)$$

### 1. Localisation Scheme

[0052] A number of localisation or position estimation algorithms were implemented, which imply two steps:

[0053] acquisition of the distance of the marker 2 by means of the four nodes S0, S1, S2 and S3 antennas signals; and

[0054] processing of the signals for obtaining the position estimation of the moving target 2.

[0055] In particular, in the case wherein more than one objective is to be detected, such as a manual vehicle, a further step is provided, which is carried out before the other two now cited, i.e. a detection or discovery step of the objectives in the operating range of a node, in particular a so called master node, which will be discuss below.

[0056] The first distance acquisition step will described first.

[0057] In all the considered algorithms, when the vehicle, for example a LGV, is static or moving forward, node S0 acts as a master node in the odd iterations and node S3 acts as master node in the even iterations, while, when the LGV moves backwards, node S1 acts as master node in the odd iterations and node S2 acts as master node in the even iterations.

[0058] During the discovery phase (mainly for multi-target scenarios), the master node interrogates in sequence all possible mobile targets, whose existence in the system is assumed known a priori. The output of the discovery phase is the list of the only mobile targets present within the action

range of the master node. The subsequent steps are repeated for all and only the moving targets thus identified. The schema for the acquisition phase of the distance is the following:

[0059] all nodes S0, S1, S2, S3 are in the sleeping state;

[0060] the master node is activated;

[0061] the master node sends signals in the automated warehouse network until it receives the response from the marker or ID—in the event that an identification code is provided—of a mobile target 2;

[0062] once the master node receives the response from the marker or ID of a moving target 2, it is placed in the sleeping state and activates the slave node S11;

[0063] the slave node S11 interrogates the marker or ID of the mobile target 2 which had responded to the master node;

[0064] the slave node S11 is placed in the sleeping state and activates the slave node S12;

[0065] the slave node S12 queries the marker or ID of the mobile target 2 which had responded to the master node;

[0066] the slave node S12 is placed in the sleeping state and activates the slave node S13;

[0067] the slave node S13 queries the marker or ID of the mobile target 2 which had responded to the master node;

[0068] the slave node S13 is placed in the sleeping state.

[0069] The S13 slave node is the node or end at a node of the antenna connected to the same emission/receiving unit of the master node, while the slave node S12 and the slave node S11 are the two nodes connected to the other emission/receiving unit, and the slave node S11 is on the same side of the master node.

[0070] Therefore, the following configurations are the only possible:

[0071] with the vehicle 3 that moves forward, odd iterations: the node S0 is the master node, the node S3 is the first slave node, the node S1 is the second slave node and the node S2 is the third slave node;

[0072] with the vehicle 3 that moves forward, even iterations: the node S3 is the master node, the node S0 is the first slave node, the node S2 is the second slave node and the node S1 is the third slave node;

[0073] with the vehicle 3 that moves backward, odd iterations: the node S1 is the master node, the node S2 is the first slave node, the node S0 is the second slave node and the node S3 is the third slave node; and

[0074] with the vehicle 3 that moves backward, even iterations: the node S2 is the master node, the node S1 is the first slave node, the node S3 is the second slave node and the node S0 is the third slave node.

[0075] After receiving responses from all slave nodes, the estimating of the position begins, which will now be described.

[0076] Each estimate of the distance from each antenna of nodes S0, S1, S2, S3 is evaluated on the basis of a circumference with center at the position of the respective node and whose radius is the estimated distance, circumference which is ideally traced by the signal emitted from each antenna or node. For this reason, assuming that all the slave nodes respond, one would have four circumferences.

[0077] Designating the coordinates of the master as [xM, yM] and the slave nodes coordinates as [xsl1, ysl1] [xsl2, ysl2] [xsl3, ysl3], one would have:

$$CM=(x-xM)^2+(y-yM)^2=r_M^2 \quad (2.3)$$

$$Cs11=(x-xsl1)^2+(y-ysl1)^2=r_{s11}^2 \quad (2.4)$$

$$Cs12=(x-xsl2)^2+(y-ysl2)^2=r_{s12}^2 \quad (2.5)$$

$$Cs13=(x-xsl3)^2+(y-ysl3)^2=r_{s13}^2 \quad (2.6)$$

where  $r_M$ ,  $r_{s11}$ ,  $r_{s12}$  and  $r_{s13}$  are the distances estimated from the master node, the first slave node, the second slave node and the third slave node.

[0078] The intersection of the four circumferences should give the position of the mobile target.

[0079] Because of possible errors, the four circumferences may not intersect at a single point. Of course, many strategies can be used to find the estimate of the position of the target.

[0080] Some of the possible algorithms used for this purpose will now be described.

## 2. Algorithm 1

[0081] 2.1. This algorithm operates in the following way.

[0082] If all slave nodes respond:

[0083] if  $\min\{vPeaks11, vPeaks12, vPeaks13\}=vPeaks11$  then the estimated distance from the first slave node is ignored and the localization strategy is explained in paragraph 2.4;

[0084] if  $\min\{vPeaks11, vPeaks12, vPeaks13\}=vPeaks12$  then the estimated distance from the second slave node is ignored and the localization strategy is explained in paragraph 2.3;

[0085] if  $\min\{vPeaks11, vPeaks12, vPeaks13\}=vPeaks13$  then the estimated distance from the third slave node is ignored and the localization strategy is explained in paragraph 2.2;

[0086] with  $vPeak$  that is the absolute maximum value in the window of the front edge of the received waveform.

[0087]  $vPeak$  represents a kind of received power, because it corresponds to the absolute maximum value detected in the main UWB impulse received. In this regard, due to reflections indoors or into a building, it is very likely that more replicas of the same transmitted impulse arrive to the receiver: among these, one is the main (the "stronger") and  $vPeak$  corresponds to its absolute maximum value (the impulse could also be negative, but with high maximum absolute value). The higher are the values for  $vPeak$ , the higher is the received power.

[0088] Consequently, high  $vPeak$  values correspond to more reliable measurements of the distance estimate, and are probably related to paths of a signal of a target in direct visibility.

2.2. If the third slave node does not respond, then  $CM \cap Cs11$  and  $CM \cap Cs12$  is evaluated.

2.2.1 If  $\{P0, P1\}=CM \cap Cs11$  and  $\{Q0, Q1\}=CM \cap Cs12$

[0089]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  is selected in such a way that

$$\|P-Q\|=\min_{i,j \in \{0,1\}}\|P_i-Q_j\|$$

[0090] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the mobile target 2.

2.2.2 If  $0=CM \cap Cs11$  and  $\{Q0, Q1\}=CM \cap Cs12$

[0091] the two points  $P0 \in CM$  and  $P1 \in Cs11$  are evaluated in such a way that

$$\|P0-P1\|=\min_{P \in CM, Q \in Cs11}\|P-Q\|$$

[0092] if  $\|P0-P1\| < d_{th}$  one goes to the point 2.2.1

[0093] otherwise, as estimate of the position of the mobile target 2, the point between  $Q0$  and  $Q1$  with the lower x-coordinate (if the master node is  $S0$  or  $S1$ ) or greater x-coordinate (if the master node is  $S2$  or  $S3$ ) is selected.

2.2.3 If  $\{P0, P1\}=CM \cap Cs11$  and  $0=CM \cap Cs12$

[0094] the two points  $Q0 \in CM$  and  $Q1 \in Cs12$  are evaluated in such a way that

$$\|Q0-Q1\|=\min_{P \in CM, Q \in Cs12}\|P-Q\|$$

[0095] if  $\|Q0-Q1\| < d_{th}$  one goes to the point 2.2.1

[0096] otherwise, as estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the greater y-coordinate (if the vehicle or the LGV is moving forward) or with the lower y-coordinate (if the vehicle or the LGV is moving backward).

[0097]  $d_{th}$  is a threshold distance that is used in order to maximize the performances of the localization algorithm (in terms of probability of error). In other words,  $d_{th}$  is a design parameter of the algorithm.

2.2.4 If  $0=CM \cap Cs11$  and  $0=CM \cap Cs12$

[0098] the two points  $Q0 \in CM$  and  $Q1 \in Cs12$  are evaluated in such a way that

$$\|P0-P1\|=\min_{P \in CM, Q \in Cs11}\|P-Q\|$$

[0099] the two points  $Q0 \in CM$  and  $Q1 \in Cs12$  are evaluated in such a way that

$$\|Q0-Q1\|=\min_{P \in CM, Q \in Cs12}\|P-Q\|$$

[0100] if  $\|P0-P1\| \leq d_{th}$  and  $\|Q0-Q1\| \leq d_{th}$  one goes to the point 2.2.1.

[0101] If  $\|P0-P1\| \leq d_{th}$  and  $\|Q0-Q1\| > d_{th}$ , as estimate of the position of the mobile target 2, the barycenter of the two points  $P0$  and  $P1$ , that is  $0.5(P0+P1)$  is selected.

[0102] If  $\|P0-P1\| > d_{th}$  and  $\|Q0-Q1\| \leq d_{th}$ , as estimate of the position of the mobile target 2, the barycenter of the two points  $Q0$  and  $Q1$ , that is  $0.5(Q0+Q1)$  is selected.

[0103] If  $\|P0-P1\| > d_{th}$  and  $\|Q0-Q1\| > d_{th}$ , the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.3. If the second slave node does not respond, then  $CM \cap Cs11$  and  $CM \cap Cs13$  is evaluated.

2.3.1 If  $\{P0, P1\}=CM \cap Cs11$  and  $\{Q0, Q1\}=CM \cap Cs13$

[0104]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected in such a way that

$$\|P-Q\|=\min_{i,j \in \{0,1\}}\|P_i-Q_j\|$$

[0105] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the mobile target 2.

2.3.2 If  $0=CM \cap Cs11$  and  $\{Q0, Q1\}=CM \cap Cs13$

[0106] the two points  $P0 \in CM$  and  $P1 \in Cs11$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs11} \|P-Q\|$$

[0107] if  $\|P0-P1\| < d_{th}$ , one goes to 2.3.1

[0108] otherwise, as an estimate of the position of the mobile target 2 is selected the point between  $Q0$  and  $Q1$  with the higher x-coordinate (if the master node is  $S0$  or  $S1$ ) or the lower x-coordinate (if the master node is  $S2$  or  $S3$ ).

2.3.3 If  $\{P0, P1\}=CM \cap Cs11$  and  $0=CM \cap Cs13$

[0109] as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the greater y-coordinate (if the vehicle or the LGV is moving forward) or with the lower y-coordinate (if the vehicle or the LGV is moving backward).

2.3.4 If  $0=CM \cap Cs11$  and  $0=CM \cap Cs13$

[0110] the two points  $P0 \in CM$  and  $P1 \in Cs11$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs11} \|P-Q\|$$

[0111] If  $\|P0-P1\| \leq d_{th}$ , one goes to 2.3.3

[0112] otherwise, the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.4 If the first slave node does not respond, then  $CM \cap Cs12$  and  $CM \cap Cs13$  is evaluated.

2.4.1 If  $\{P0, P1\}=CM \cap Cs12$  and  $\{Q0, Q1\}=CM \cap Cs13$

[0113]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected in such a way that

$$\|P-Q\| = \min_{i, j \in \{0, 1\}} \|P_i - Q_j\|$$

[0114] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the mobile target 2.

2.4.2 If  $0=CM \cap Cs12$  and  $\{Q0, Q1\}=CM \cap Cs13$

[0115]  $P0 \in CM$  and  $P1 \in Cs12$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs12} \|P-Q\|$$

[0116] if  $\|P0-P1\| < d_{th}$ , one goes to the point 2.4.1

[0117] otherwise, as an estimate of the position of the mobile target 2 is selected the point between  $Q0$  and  $Q1$  with the lower x-coordinate (if the master node is  $S0$  or  $S1$ ) or the greater x-coordinate (if the master node is  $S2$  or  $S3$ ).

2.4.3 If  $\{P0, P1\}=CM \cap Cs12$  and  $0=CM \cap Cs13$

[0118] as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the lower x-coordinate (if the master node is  $S0$  or  $S1$ ) or with the greater x-coordinate (if the master node is  $S2$  or  $S3$ ).

2.4.4 If  $0=CM \cap Cs12$  and  $0=CM \cap Cs13$

[0119] the two points  $P0 \in CM$  and  $P1 \in Cs12$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs12} \|P-Q\|$$

[0120] If  $\|P0-P1\| \leq d_{th}$ , one goes to 2.4.3

[0121] otherwise, the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.5 If only the first slave node responds

[0122]  $CM \cap Cs11$  is evaluated.

2.5.1. If  $\{P0, P1\}=CM \cap Cs11$  as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the greater y-coordinate (if the vehicle or the LGV is moving forward) or with the lower y-coordinate (if the vehicle or the LGV is moving backward).

2.5.2 If  $0=CM \cap Cs11$

[0123] the two points  $P0 \in CM$  and  $P1 \in Cs11$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs12} \|P-Q\|$$

If  $\|P0-P1\| < d_{th}$ , as an estimate of the position of the mobile target 2 is selected the barycenter of the two points  $P0$  and  $P1$ , that is  $0.5(P0+P1)$  otherwise, the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.6 If only the second slave node responds

[0124]  $CM \cap Cs12$  is evaluated.

2.6.1. If  $\{P0, P1\}=CM \cap Cs12$  as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the lower x-coordinate (if the master node is  $S0$  or  $S1$ ) or with the greater x-coordinate (if the master node is  $S2$  or  $S3$ ).

2.6.2 If  $0=CM \cap Cs12$

[0125] the two points  $P0 \in CM$  and  $P1 \in Cs11$  are evaluated so that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs11} \|P-Q\|$$

[0126] If  $\|P0-P1\| < d_{th}$ , as an estimate of the position of the mobile target 2 is selected the barycenter of the two points  $P0$  and  $P1$ , that is  $0.5(P0+P1)$ .

[0127] Otherwise, the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.7 If only the third slave node responds

[0128]  $CM \cap Cs13$  is evaluated.

2.7.1. If  $\{P0, P1\}=CM \cap Cs13$  as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the greater x-coordinate (if the master node is  $S0$  or  $S1$ ) or with the lower x-coordinate (if the master node is  $S2$  or  $S3$ ).

2.7.2 If  $0=CM \cap Cs13$ , the position of the mobile target 2 is set equal to  $[0, 0]$ .

2.8 If none of the slave node responds, the position of the mobile target 2 is set equal to  $[0, 0]$ .

### 3. Algorithm 2

[0129] The algorithm 2 presents points 5, 6, 7 and 8 corresponding to points 5, 6, 7 and 8 of the algorithm 1. Point 1 corresponds formally to the point 1 of the algorithm 1, but with reference to point 2, 3, 4 they operate in a different manner

3.1. If all three slave nodes respond

[0130] If  $\min \{vPeaks11, vPeaks12, vPeaks13\} = vPeaks11$  then the estimate of the first slave node distance is ignored. The localization strategy is explained in section 3.4.

[0131] If  $\min \{vPeaks11, vPeaks12, vPeaks13\} = vPeaks12$  then the estimate of the second slave node distance is ignored. The localization strategy is explained in section 3.3.

[0132] If  $\min \{vPeaks11, vPeaks12, vPeaks13\} = vPeaks13$  then the estimate of the third slave node distance is ignored. The localization strategy is explained in section 3.2.

3.2. If the third slave node does not respond

[0133]  $CM \cap Cs1$  and  $CM \cap Cs2$  are evaluated

[0134] A. If  $vPeaks1 \geq thvPeak$  and  $vPeaks2 \geq thvPeak$

3.2.1 If  $\{P0, P1\} = CM \cap Cs1$  and  $\{Q0, Q1\} = CM \cap Cs2$

[0135]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected so that

$$\|P-Q\| = \min_{i,j \in \{0,1\}} \|Pi-Qj\|$$

[0136] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the mobile target 2.

3.2.2 If  $0 = CM \cap Cs1$  and  $\{Q0, Q1\} = CM \cap Cs2$

[0137] the two points  $P0 \in CM$  and  $P1 \in Cs1$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs1} \|P-Q\|$$

[0138] If  $\|P0-P1\| < d_{th}$  one goes to the point 3.2.1

[0139] otherwise as an estimate of the position of the mobile target 2 is selected the point between  $Q0$  and  $Q1$  with the lower x-coordinate (if the master node is  $S0$  or  $S1$ ) or with the greater x-coordinate (if the master node is  $S2$  or  $S3$ ).

3.2.3 If  $\{P0, P1\} = CM \cap Cs1$  and  $0 = CM \cap Cs2$

[0140] The two points  $Q0 \in CM$  and  $Q1 \in Cs2$  are evaluated in such a way that

$$\|Q0-Q1\| = \min_{P \in CM, Q \in Cs2} \|P-Q\|$$

[0141] If  $\|Q0-Q1\| < d_{th}$  one goes to the point 3.2.1

[0142] otherwise as an estimate of the position of the mobile target 2 is selected the point between  $P0$  and  $P1$  with the greater y-coordinate (if the LGV is moving forward) or with the lower y-coordinate (if the LGV is moving backward).

3.2.4 If  $0 = CM \cap Cs1$  and  $0 = CM \cap Cs2$

[0143] The two points  $P0 \in CM$  and  $P1 \in Cs2$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs1} \|P-Q\|$$

[0144] The two points  $Q0 \in CM$  and  $Q1 \in Cs2$  are evaluated in such a way that

$$\|Q0-Q1\| = \min_{P \in CM, Q \in Cs2} \|P-Q\|$$

[0145] If  $\|P0-P1\| \leq d_{th}$  and  $\|Q0-Q1\| \leq d_{th}$  one goes to the point 3.2.1.

[0146] If  $\|P0-P1\| \leq d_{th}$  and  $\|Q0-Q1\| > d_{th}$ , as estimate of the position of the mobile target 2, the barycenter of the two points  $P0$  and  $P1$ , that is  $0.5(P0+P1)$  is selected.

[0147] If  $\|P0-P1\| > d_{th}$  and  $\|Q0-Q1\| \leq d_{th}$ , as estimate of the position of the mobile target 2, the barycenter of the two points  $Q0$  and  $Q1$ , that is  $0.5(Q0+Q1)$  is selected.

[0148] If  $\|P0-P1\| > d_{th}$  and  $\|Q0-Q1\| > d_{th}$ , the position of the mobile target 2 is set equal to  $[0,0]$ .

[0149] B. If  $vPeaks1 \geq thvPeak$  and  $vPeaks2 < thvPeak$  one goes to the point 5, corresponding to the point 2.5 of the algorithm 1

[0150] C. If  $vPeaks1 < thvPeak$  and  $vPeaks2 \geq thvPeak$  one goes to the point 6, corresponding to the point 2.6 of the algorithm 1

[0151] D. If  $vPeaks1 < thvPeak$  and  $vPeaks2 < thvPeak$

[0152] If  $vPeaks1 \leq vPeaks2$  one goes to the point 6, corresponding to the point 2.6 of the algorithm 1

[0153] If  $vPeaks1 > vPeaks2$  one goes to the point 5, corresponding to the point 2.5 of the algorithm 1

3.3. If the second slave node does not respond

[0154]  $CM \cap Cs1$  and  $CM \cap Cs3$  are evaluated

[0155] A. If  $vPeaks1 \geq thvPeak$  and  $vPeaks3 \geq thvPeak$

3.3.1 If  $\{P0, P1\} = CM \cap Cs1$  and  $\{Q0, Q1\} = CM \cap Cs3$

[0156]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected so that

$$\|P-Q\| = \min_{i,j \in \{0,1\}} \|Pi-Qj\|$$

[0157] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the mobile target 2.

3.3.2 If  $0 = CM \cap Cs1$  and  $\{Q0, Q1\} = CM \cap Cs3$

[0158] The two points  $P0 \in CM$  and  $P1 \in Cs1$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs1} \|P-Q\|$$

[0159] If  $\|P0-P1\| < d_{th}$  one goes to the point 3.3.1

[0160] otherwise as an estimate of the position of the mobile target 2 is selected the point between  $Q0$  and  $Q1$  with the greater x-coordinate (if the master node is  $S0$  or  $S1$ ) or with the lower x-coordinate (if the master node is  $S2$  or  $S3$ ).

3.3.3 If  $\{P0, P1\} = CM \cap Cs1$  and  $0 = CM \cap Cs3$

[0161] As an estimate of the position of the moving target 2 the point between  $P0$  and  $P1$  with the y-coordinate greater (if the LGV is moving forward) or the y-coordinate lower (if the LGV is moving backwards) is selected.

3.3.4 If  $0 = CM \cap Cs1$  and  $0 = CM \cap Cs3$

[0162] The two points  $P0 \in CM$  and  $P1 \in Cs1$  are evaluated in such a way that

$$\|P0-P1\| = \min_{P \in CM, Q \in Cs1} \|P-Q\|$$

[0163] If  $\|P0-P1\| \leq d_{th}$  one goes to point 3.3.3

[0164] otherwise, the position of the moving target 2 is settled equal to  $[0, 0]$ .

[0165] B. If  $vPeaks1 \geq thvPeak$  and  $vPeaks3 < thvPeak$  one goes to point 5, corresponding to the point 2.5 of the algorithm 1

[0166] C. If  $vPeaks1 < thvPeak$  and  $vPeaks3 \geq thvPeak$  one goes to point 7, corresponding to the point 2.7 of the algorithm 1

[0167] D. If  $vPeaks1 < thvPeak$  and  $vPeaks3 < thvPeak$

[0168] If  $vPeaks1 \leq vPeaks3$  one goes to point 7, corresponding to the point 2.7 of the algorithm 1

[0169] If  $vPeaks1 > vPeaks3$  one goes to point 5, corresponding to the point 2.5 of the algorithm 1

3.4. If the first slave node does not answer

[0170] It should be evaluated  $CM \cap Cs2$  and  $CM \cap Cs3$

[0171] A. If  $vPeaks2 \geq thvPeak$  and  $vPeaks3 \geq thvPeak$

3.4.1 If  $\{P0, P1\} = CM \cap Cs2$  and  $\{Q0, Q1\} = CM \cap Cs3$

[0172]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected such that

$$\|P-Q\| = \min_{i,j \in \{0,1\}} \|Pi-Qj\|$$

[0173] The barycenter of the two points  $0.5(P+Q)$  is considered as an estimate of the position of the moving target 2.



3.4.2 If  $0 = CM \cap Cs12$  and  $\{Q0, Q1\} = CM \cap Cs13$

[0174] The two points  $P0 \in CM$  and  $P1 \in Cs12$  are evaluated in such a way that

$$\|P0 - P1\| = \min_{P \in CM, Q \in Cs11} \|P - Q\|$$

[0175] If  $\|P0 - P1\| < d_{th}$  one goes to point 3.4.1

[0176] otherwise, as an estimate of the position of the moving target 2 the point between Q0 and Q1 with the x-coordinate lower (if the master node is S0 or S1) or with the x-coordinate greater (if the master node is S2 or S3) is selected.

3.4.3 If  $\{P0, P1\} = CM \cap Cs12$  and  $0 = CM \cap Cs13$

[0177] As an estimate of the position of the moving target 2 the point between P0 and P1 with the x-coordinate lower (if the master node is S0 or S1) or with the x-coordinate greater (if the master node is S2 or S3) is selected.

3.4.4 If  $0 = CM \cap Cs12$  and  $0 = CM \cap Cs13$

[0178] The two points  $P0 \in CM$  and  $P1 \in Cs12$  are evaluated in such a way that

$$\|P0 - P1\| = \min_{P \in CM, Q \in Cs11} \|P - Q\|$$

[0179] If  $\|P0 - P1\| \leq d_{th}$  one goes to point 3.4.3

[0180] otherwise, the position of the moving target 2 is settled equal to  $[0, 0]$ .

[0181] B. If  $vPeaks12 \geq thvPeak$  and  $vPeaks13 < thvPeak$  one goes to point 6, corresponding to the point 2.6 of the algorithm 1

[0182] C. If  $vPeaks12 < thvPeak$  and  $vPeaks13 \geq thvPeak$  one goes to point 7, corresponding to the point 2.7 of the algorithm 1

[0183] D. If  $vPeaks12 < thvPeak$  and  $vPeaks13 < thvPeak$

[0184] If  $vPeaks12 \leq vPeaks13$  one goes to point 7, corresponding to point 2.7 of the algorithm 1

[0185] If  $vPeaks12 > vPeaks13$  one goes to point 6, corresponding to the point 2.6 of the algorithm 1

#### 4. Algorithm 1-A

[0186] This algorithm is similar to algorithm 1, with points 2, 3, 4, 5, 6, 7 and 8 identical to those of the algorithm 1. The point 1 works in a different manner in the algorithms explained in the foregoing, the circumference related to the master has always been taken into account. Upon analyzing the collected results, it has been verified that this is not always the best choice, since the interval estimations from the master can be wrong as those of the slave nodes. For this reason, when all the three slave nodes answer (i. e. when four interval estimations from all the nodes are available), if the value of  $vPeak$  referred to the master is lower than those of the slave nodes, the interval measure of the master is ignored.

[0187] The point 1 is then changed as follows:

[0188] If all the three slave nodes answer

[0189] If  $\min\{vPeak_m, vPeaks11, vPeaks12, vPeaks13\} = vPeak_m$  then the distance estimate of the master is ignored.

4.1 If  $\{P0, P1\} = Cs11 \cap Cs13$  and  $\{Q0, Q1\} = Cs12 \cap Cs13$

[0190]  $P \in \{P0, P1\}$  and  $Q \in \{Q0, Q1\}$  are selected such that

$$\|P - Q\| = \min_{i, j \in \{0, 1\}} \|P_i - Q_j\|$$

[0191] The barycenter of the two points  $0,5(P+Q)$  is considered as an estimate of the position of the moving target 2.

4.2 If  $0 = Cs11 \cap Cs13$  and  $\{Q0, Q1\} = Cs12 \cap Cs13$

[0192] The two points  $P0 \in Cs11$  and  $P1 \in Cs13$  are evaluated in such a way that

$$\|P0 - P1\| = \min_{P \in Cs11, Q \in Cs13} \|P - Q\|$$

[0193] If  $\|P0 - P1\| < d_{th}$  one goes to point 4.1

[0194] otherwise, as an estimate of the position of the moving target 2 the point between Q0 and Q1 with the y-coordinate greater (if the master node is S0 or S3) or the y-coordinate lower (if the master node is S1 or S2) is selected.

4.3 If  $\{P0, P1\} = Cs11 \cap Cs13$  and  $0 = Cs12 \cap Cs13$

[0195] The two points  $Q0 \in Cs12$  and  $Q1 \in Cs13$  are evaluated such that

$$\|Q0 - Q1\| = \min_{P \in Cs12, Q \in Cs13} \|P - Q\|$$

[0196] If  $\|Q0 - Q1\| < d_{th}$  one goes to point 4.1

[0197] otherwise, as an estimate of the position of the moving target 2 the point between P0 and P1 with the x-coordinate lower (if the master node is S0 or S1) or the x-coordinate greater (if the master node is S2 or S3) is selected.

4.4 If  $0 = Cs11 \cap Cs13$  and  $0 = Cs12 \cap Cs13$

[0198] The two points  $P0 \in Cs11$  and  $P1 \in Cs13$  are evaluated in such a way that

$$\|P0 - P1\| = \min_{P \in Cs11, Q \in Cs13} \|P - Q\|$$

[0199] The two points  $Q0 \in Cs12$  and  $Q1 \in Cs13$  are evaluated such that

$$\|Q0 - Q1\| = \min_{P \in Cs12, Q \in Cs13} \|P - Q\|$$

[0200] If  $\|P0 - P1\| \leq d_{th}$  and  $\|Q0 - Q1\| \leq d_{th}$  one goes to 4.1

[0201] If  $\|P0 - P1\| \leq d_{th}$  and  $\|Q0 - Q1\| > d_{th}$  as an estimate of the position of the moving target 2, the barycenter of the two points P0 and P1, i. e.  $0,5(P0+P1)$  is selected.

[0202] If  $\|P0 - P1\| > d_{th}$  and  $\|Q0 - Q1\| \leq d_{th}$  as an estimate of the position of the moving target 2, the barycenter of the two points Q0 and Q1, i. e.  $0,5(Q0+Q1)$  is selected.

[0203] If  $\|P0 - P1\| > d_{th}$  and  $\|Q0 - Q1\| \geq d_{th}$  the position of the moving target 2 is settled equal to  $[0, 0]$ .

[0204] If  $\min\{vPeak_m, vPeaks11, vPeaks12, vPeaks13\} = vPeaks11$  then the estimate of the distance of the first slave node is ignored. The localisation strategy is that explained under point 2.4 of the algorithm 1

[0205] If  $\min\{vPeak_m, vPeaks11, vPeaks12, vPeaks13\} = vPeaks12$  then the estimate of the distance of the second slave node is ignored. The localisation strategy is that explained under point 2.3 of the algorithm 1

[0206] If  $\min\{vPeak_m, vPeaks11, vPeaks12, vPeaks13\} = vPeaks13$  then the estimate of the distance of the third slave node is ignored. The localisation strategy is that explained under point 2.2 of the algorithm 1

#### 5. Algorithm 2-A

[0207] This algorithm is similar to the algorithm 2, but point 1 works in a manner similar to the algorithm 1-A and

even ignoring the measure of the master if the corresponding value of vPeak is lower to a certain threshold.

#### 6. Algorithm 1-F

[0208] This algorithm is similar to the algorithm 1-A, but the position estimates greater than 2 meters from the barycenter of the last three estimates are not considered.

#### 7. Algorithm 2-F

[0209] This algorithm is similar to the algorithm 2-A, but the position estimates greater than 2 meters from the barycenter of the last three estimates are not considered.

[0210] Therefore, according to the present invention, the localisation group comprises one or more automatic guided vehicles, such as LGV or AGV with TN (persons or forklifts or manual-guided vehicles), equipped with a sort of “radar”, for example a “UWB” radar or an “identity selective UWB radar” able to detect other moving targets at around LGV. In particular, such a radar, for example of the UWB-type, can include 2 or more nodes, for example 3 or 4 nodes managed by a centralized processing unit on board of the LGV same, which nodes on board of the vehicle perform the function of fixed anchors integral with one another.

[0211] The use of UltraWideBand (UWB) communications has the advantage of ensuring, thanks to the use of temporal pulses with a duration of tens of picoseconds, a considerable accuracy of localisation—up to a few centimeters in free space—which makes the wireless UWB technology significantly more effective than other wireless technologies, for example radio frequency technologies at low frequencies, WiFi or Bluetooth, which anyway could also be used as an alternative.

[0212] Therefore, as it will be appreciated, the main aspects of the invention subject matter of the present patent application are the following:

[0213] group with fixed nodes on a vehicle, which are integral with each other and which cooperate to localise another mobile node uncoupled to the group of fixed nodes integral with one another; all the nodes—both those integral with each other and the moving target—can use the same kind of wireless communication;

[0214] the target or moving target to be localised is of the active type and equipped with marker;

[0215] a system based on the idea of virtual anchors is made; to this regard, a plurality of antennas driven by a central unit (for example, at time division) can be employed, so that an antenna acts as a node for the measurement of a distance from the moving target; this approach has two advantages, namely (i) reduction of costs—antennas less expensive than full nodes—and (ii) ease of management, the processing unit on the vehicle manages a lower number of nodes;

[0216] particular realization of the above-mentioned systems via wireless technology of UWB type;

[0217] implementation of a localisation method with 4 fixed nodes integral with each other—anchors on the vehicle—with three steps for the estimation of the localisation of a moving node: (i) the discovery of the presence of a node or moving target and its identifier; (ii) estimates of the distances between each anchor or node and the moving node; (iii) processing of such distances in a manner suitable to calculate the position of the moving node; during the third step different

algorithms can be used, including for example pseudo-intersection of circumferences, other geometric algorithms, use of particle swarming optimization (PSO), etcetera;

[0218] extension of all the systems above described under the previous points for the localisation of a certain number (>1) of moving nodes (independent one with respect to the other) and uncoupled to the group of fixed nodes integral with one another.

[0219] Moreover, when dealing with the localisation of multiple moving nodes, it can be provided for the development of innovative algorithms to limit interferences—actually collisions—between transmissions from distinct targets.

[0220] Furthermore, as already above mentioned, the cooperation between the moving radar of the vehicle or vehicles and some fixed anchors (which are distributed, for example, in a warehouse) can be foreseen.

[0221] A possible cooperation can include, for example, fixed anchors able to obtain the list of the moving targets present in a given area, which list could help the moving anchors on vehicles, especially during the discovery phase.

[0222] Modifications and variants of the invention are possible within the scope of protection defined by the claims.

1. A localisation or estimation group of the position of a moving target, such as a person or a manual guided vehicle, in a warehouse or in an area to be monitored with at least one automatic guided vehicle, equipped with a unit for controlling the movement of the automatic guided vehicle itself and at least one moving target, said group including at least two first nodes for emitting and receiving signals, said first nodes being provided with respective antennas, a second node or marker positioned on said moving target, said marker including at least one antenna suitable for receiving/emitting signals in response to signals coming from the at least two first nodes for emitting and receiving signals, wherein said at least two first nodes for emitting and receiving signals are located on said at least one automatic guided vehicle.

2. The localisation group according to claim 1, wherein the first nodes for emitting/receiving on the automatic guided vehicle and the marker of the moving target use electromagnetic waves of the same ultra wide band type, abbreviated to UWB, or other types of transmission signals via electromagnetic waves, such as Wi-Fi or Bluetooth.

3. The localisation group according to claim 1, wherein the antennas of said at least two first nodes for emitting and receiving signals are controlled by a number of emission/receiving units lower than the number of said first nodes.

4. The localisation group according to claim 3, wherein said emission/receiving units comprise means for performing the time division multiplexing of signals to and from said first nodes for emitting and receiving signals.

5. The localisation group according to claim 3, wherein said first nodes for emitting and receiving signals are connected to the emission/receiving units via transmission means.

6. The localisation group according to claim 1, wherein said first nodes for emitting and receiving signals are four and are positioned in proximity to a corner of the outline of the automatic guided vehicle, considering the plan view of the outline of the automatic guided vehicle approximately as a rectangle, thus allowing a more favourable geometric location of nodes on the automatic guided vehicle to perform the triangulation with the moving target.

7. The localisation group according to claim 1, comprising some nodes with the respective antennas at fixed points of the warehouse or area.

8. The localisation group according to claim 3, wherein said automatic guided vehicle comprises a control unit or programmed control unit controlling said emission/receiving units, receiving detection input signals of said at least two nodes and calculating the position of said at least one target.

9. The localisation group according to claim 8, wherein said control unit or programmed control unit is comprised in the same unit for controlling the movement of the automatic guided vehicle.

10. The localisation method of a moving target via a localisation group according to claim 1, comprising the following steps:

acquiring the signals of the distance of said at least two first nodes from said at least one moving target; and processing the signals of the distance to obtain the position estimate of said at least one moving target.

11. The method according to claim 10, wherein said processing step of the signals of the distance includes the following steps:

assigning to one node the role of master node and to at least another node the role of slave node;

setting all the nodes to the sleeping state;

activating the master node;

sending signals from said master node to the node network of said warehouse until it receives a response from the marker of a moving target;

once said master node has received a response from a moving target, setting said master node to the sleeping state and activating at least one slave node;

sending signals from said slave node to the node network of said warehouse until it receives a response from the marker of said moving target that had responded to said master node;

setting said slave node to the sleeping state;

repeating the procedure for all the remaining slave nodes and storing all the signals of the responses received from the master node and from all the slave nodes,

processing said stored signals to obtain the position estimate of said at least one moving target.

12. The method according to claim 10, comprising a step of identification of the targets present within the working range of a master node, said identification step being carried out before said steps that provide for acquiring, computing and processing.

13. The method according to claim 10, wherein said signal processing for obtaining the position estimate of said at least one target is carried out by intersecting circumferences with their centre at the position of said at least two nodes, said circumferences being ideally traced by the signals emitted by each node.

14. An automatic guided vehicle for a localisation or estimation group of the position of a moving target according to claim 1, said vehicle comprising a unit for controlling the movement of said automatic guided vehicle itself, as well as at least two first nodes for emitting and receiving signals, said first nodes being provided with respective antennas.

15. The vehicle according to claim 14, wherein said at least two first nodes for emitting and receiving signals use electromagnetic waves of the ultra wide band type, or other types of transmission signals via electromagnetic waves, such as Wi-Fi or Bluetooth.

16. The vehicle according to claim 14, wherein said antennas of said at least two first nodes for emitting and receiving signals are controlled by a number of emission and receiving units lower than the number of said first nodes.

17. A vehicle according to claim 16, wherein said emission and receiving units comprise means for performing the time division multiplexing of signals to and from said first nodes for emitting and receiving signals.

18. A vehicle according to claim 14, wherein said first nodes for emitting and receiving signals are four and are positioned in proximity to a corner of the outline of the automatic guided vehicle.

\* \* \* \* \*